



## jGun® DUAL SPEED Pneumatic Torque Tool

The jGun DUAL SPEED is the only pneumatic multiplier that gives you the flexibility to use it for rundown, final torque, and heavy duty breakout. For fast rundown and powerful torque capability, the jGun DUAL SPEED is the industry's most reliable choice.

### WHEEL GUN ACCESSORY



The Wheel Gun Accessory is the obvious choice for wheel bolting and all nuts and bolts in confined spaces. The powerful extension system delivers the desired torque without compromise to power or durability. With industry-leading repeatability and intuitive design, job integrity is always assured.

### 3-IN-1 BOLTING SYSTEM




A simple twist of the collar switches the tool from high speed rundown mode into the max power mode with adjustable torque so you can choose the right output for your job.

### INTUITIVE DESIGN



This robust tool eliminates the need for multiple systems making training simpler and reducing the chance for operator error. When multiple systems are used to assemble a bolted joint there is more chance for operator error. The jGun DUAL SPEED makes the job simpler by giving operators one easy to use system that can be used from start to finish.

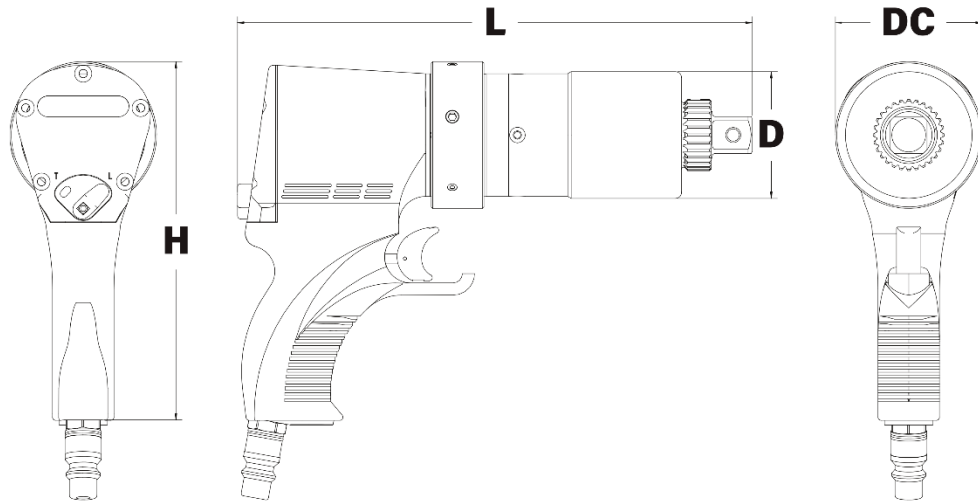

LEGEND: H = HEIGHT L = LENGTH D = OUTER DIAMETER OF GEARBOX DC = DIAMETER OF COLLAR

| MODEL NUMBER                  | H    | L     | D    | DC   | SQUARE DRIVE | WEIGHT | TORQUE       |              | RPM  |      |
|-------------------------------|------|-------|------|------|--------------|--------|--------------|--------------|------|------|
| IMPERIAL                      | in.  |       |      |      |              | lbs.   | ft-lbs (Min) | ft-lbs (Max) | High | Low  |
| J - A.5 - AP                  | 7.32 | 8.07  | 2.58 | 2.99 | 3/4          | 9.04   | 194          | 502          | 465  | 24.0 |
| J - A1 - AP                   | 7.40 | 10.55 | 2.58 | 2.99 | 3/4          | 9.70   | 312          | 1,272        | 126  | 6.5  |
| J - A2 - AP                   | 8.42 | 12.51 | 3.25 | 4.48 | 1            | 15.00  | 520          | 2,039        | 97   | 5.0  |
| J - A3 - AP                   | 7.50 | 12.48 | 3.19 | 2.99 | 1            | 12.00  | 830          | 3,072        | 39   | 2.0  |
| J - A5 - AP                   | 8.42 | 14.65 | 4.15 | 4.48 | 1-1/2        | 22.50  | 1,215        | 5,007        | 48   | 2.5  |
| J - A8 - AP                   | 8.46 | 15.38 | 4.56 | 4.48 | 1-1/2        | 28.75  | 2,079        | 8,285        | 29   | 1.5  |
| WHEEL GUN<br>J - A1 - AP - WG | 7.40 | 10.55 | 2.58 | 2.99 | 3/4          | 12.0   | 255          | 1,075        | 322  | 17   |
| METRIC                        | mm   |       |      |      | in.          | kg     | Nm (Min)     | Nm (Max)     | High | Low  |
| J - A.5 - AP                  | 186  | 205   | 66   | 76   | 3/4          | 4.11   | 263          | 680          | 465  | 24.0 |
| J - A1 - AP                   | 188  | 268   | 66   | 76   | 3/4          | 4.41   | 423          | 1724         | 126  | 6.5  |
| J - A2 - AP                   | 214  | 318   | 83   | 114  | 1            | 6.82   | 705          | 2763         | 97   | 5.0  |
| J - A3 - AP                   | 191  | 317   | 81   | 76   | 1            | 5.45   | 1125         | 4163         | 39   | 2.0  |
| J - A5 - AP                   | 214  | 372   | 105  | 114  | 1-1/2        | 10.23  | 1646         | 6785         | 48   | 2.5  |
| J - A8 - AP                   | 215  | 391   | 116  | 114  | 1-1/2        | 13.07  | 2817         | 11226        | 29   | 1.5  |
| WHEEL GUN<br>J - A1 - AP - WG | 188  | 268   | 66   | 76   | 3/4          | 5      | 346          | 1457         | 322  | 17   |

The World's Most Trusted Industrial Bolting Systems

HYTORC owns all content, copyrights, trademarks and patents in this document. © 2021 HYTORC. Any unauthorized use or distribution of any material from this document is strictly prohibited.



Headquarters:  
12420 TEXACO RD.  
HOUSTON, TX 77013

Phone:  
713-453-6677

Email:  
sales@hytorctexas.com

Online:  
www.hytorctexas.com